




(Tables not included)



SIZE:
24 1/2" W x 30 1/8" D x 57 1/2" H
Cycle period: 2'-3'-4' minutes
Capacity per hour:
Baskets/H 30/20/15
Dishes/H : 540/360/270
Dishes per basket 12÷18


- Electronic pass-through dishwasher;
- Stainless steel construction 18/10 AISI 304;
- **Wash cycle time: 2'-3'-4' minutes;**
- **Endless cycle : max 15 minutes;**
- Linear/Corner version;
- Soft touch electronic control panel;
- Temperature's electronic display;
- Cycle start at hood closing;
- Stainless steel lower and upper rotating wash arms;
- Stainless steel lower and upper rotating rinse arms;
- **Double skin self-washing slanted tank with rounded edges;**
- 2 integral tank filters;
- Rinse aid dispenser;
- Detergent pump;
- Automatic tank loading;
- Hood opening safety device;
- Thermocontrol: device which guarantees the selected temperature for every rinsing cycle even in case of non-stop work;
- Security thermostat;
- Certifications: UL, UL Sanitation;



L21-s L21-dps


Accessories:

- 2 baskets for dishes;
- 1 generic basket;
- 2 cutlery containers;



OPTIONS

- Tank drain unit with filter (ORDER DPS),
- Lateral entry/exit table with lower table 27,56 inch

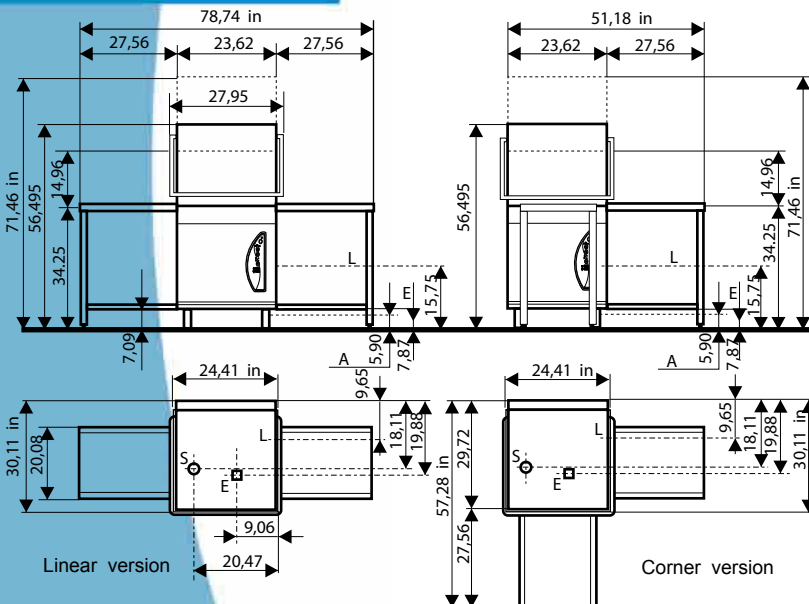

Specifications	L21-s/dps	
VOLTAGE	208 V1ph 60Hz	V
WASHING PUMP	650	W
WASH TANK ELEMENTS	2000	W
RINSE TANK ELEMENTS	6000	W
TOTAL RATING	6650	W
MAX CURRENT INTENSITY	34	A
PLATES CLEARANCE	14,96	inch
WORK HEIGHT	34,25	inch
TANK CAPACITY	5,5	Gal.
BOILER CAPACITY	1,5	Gal.
PUMP DELIVERY	70	Gal/min
WATER CONNECTION	131	°F
WATER CONSUMPTION PER CYCLE	0,6	Gal.
WATER CONSUMPTION PER HOUR	13	Gal.
WATER PRESSURE	20±5	psi
WATER HARDNESS	5 ÷ 10	TH(°F)
RINSING WATER TEMPERATURE	179 ÷ 194	°F
WATER INLET	3/4"	"G
WATER OUTLET	1 1/4"	"G
NET WEIGHT	264	Lbs
GROSS WEIGHT	286	Lbs
PACKING SIZE	l 28,74xL33,86xH56,30	inch
NOISE LEVEL	<60	dB(A)

The manufacturer reserves the right to make modifications of materials and models without warning.