

ENDURA® GREASE MANAGEMENT

The First Truly Low Profile Grease Interceptor



endura®


Lo-PRO

Grease Interceptor

IPEX is proud to introduce the Endura® Lo-PRO for those tight on-floor grease interceptor applications where space is at a premium.

Based on the same dimensional footprint as our successful 35gpm and 50gpm Endura® models, this latest 25gpm addition has an overall height of just 11 inches, and still meets the requirements of ASME12.14.3.

More importantly however the internal components can be removed in less than 6" of additional clearance making this unit a truly low profile solution.

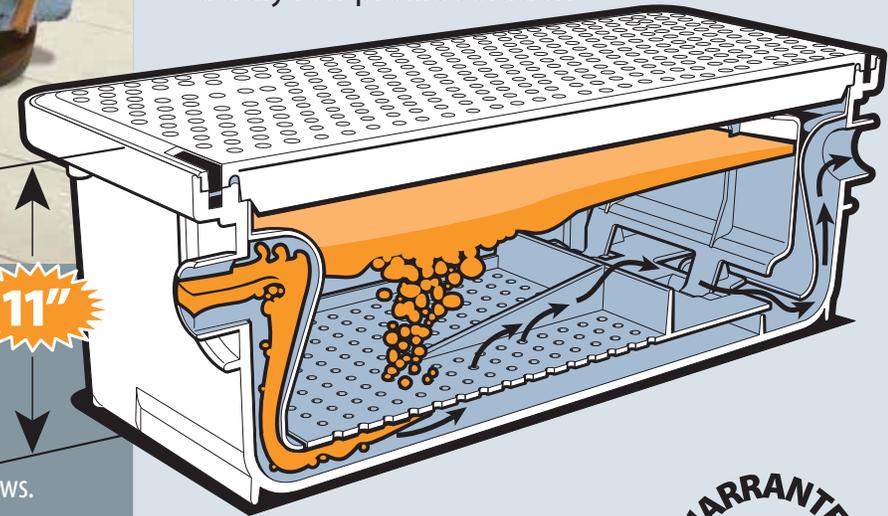

Sewer authorities and building owners spend millions of dollars every year combating grease accumulation in plumbing systems.

Grease accumulation causes sewer blockages and overflows. These overflows are a health risk to you, your employees, your customers and the general public. Injection molded in engineered thermoplastic, the Endura® Grease Interceptor provides restaurant operators the best value and performance on the market today.


11"

WARRANTED
10
YEARS

ASME
A112.14.3




MEA 160-08-E

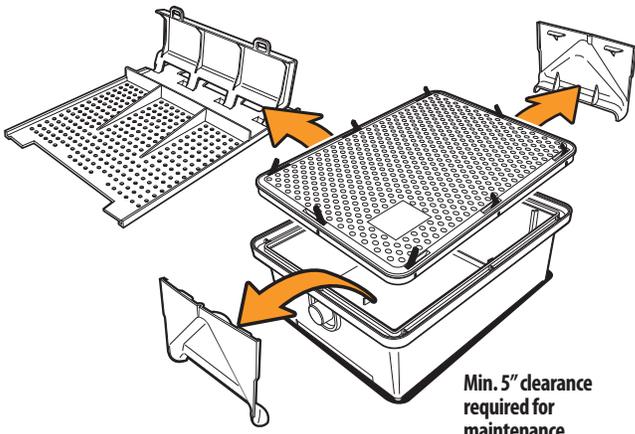

Endura[®] Lo-PRO[®] Grease Interceptor

Contractor shall install an IPEX Endura[®] Lo-PRO Grease Interceptor, Part No. 3925A02LO. An accessible flow control with a rate of 25gpm will also be installed in accordance to manufacturer's instructions. The interceptor will be able to be serviced with a min. of 5" of overhead clearance. The unit shall be comprised of engineered thermoplastics to withstand operational temperatures up to 220°F (104°C) and incorporate a lid with the capability of supporting 440 lbs. (200 Kgs). The unit will be supported by a 10 year manufacturer's extended warranty. The grease interceptor shall be certified to the current version of the PDI-G101 standard and where locally applicable to ASME112.14.3 or have UPC listing. Contractor shall provide mechanical connectors to connect the grease interceptor.

DIMENSIONS

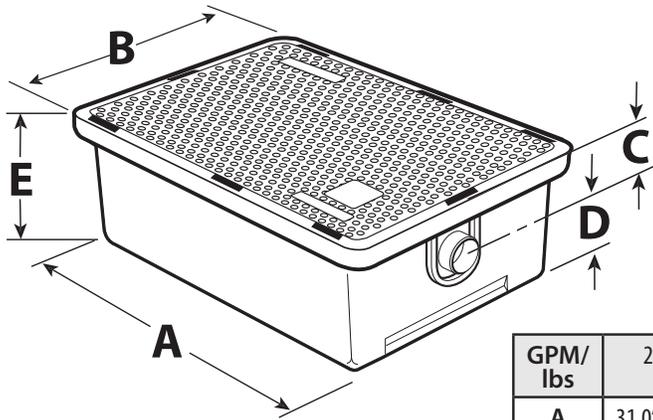


TANK

GPM/ lbs	25/50 LO
A	31.0" (787mm)
B	23.5" (597mm)
C	4" (102mm)
D	7" (178mm)
E	11" (279mm)

PART #	CTN. QTY.	SIZE
3925A02LO	1	2"

FLOW CONTROL

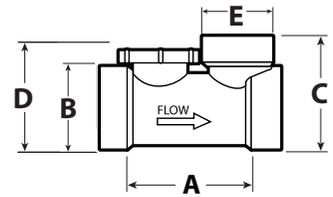

Connection Iron Pipe Size (Solvent weld)	2" h x h
A	3.94" (100 mm)
B	Nom. Dia. 2" (50.8 mm)
C	3.44" (87.4 mm)
D	3" (76 mm)
E	Nom. Dia. 1.5" (38.1 mm)

PART #	CTN. QTY.	SIZE
3922125C	1	2"

CAPACITY


US Gallons Per Minute (GPM)	25 LO
CAPACITY - Pounds	50

Litres Per Second (LPS)	1.6
CAPACITY - Kilograms	22.68

Average Efficiency % (ASME 112.4.3)	97.1%
Part Number	3925A02LO
Grease Capacity lbs (Kg) actual	53.4 (24.22)
Operating Temperature Capabilities	220°F (104°C)
Surface Load Capacity	440 lbs (200 kgs)
Unit Weight (Empty)	23.9 lbs (10.85 kgs)
Liquid Capacity	18.9 gal (71.54L)
Connection size (mechanical)	2"

Components for: Lo-PRO Grease Interceptor

ITEM	Description	Part No
1A	- Latches (left)	#3935A-6LH
1B	- Latches (right)	#3935A-6RH
2	- Reinforced polypropylene cover	#3935A-2
3	- Rubber gasket	#3935A-5
4	- Removable polypropylene baffles	#3925ALO-3
5	- Diffuser Baffle	#3925ALO-4
6	- One-piece tank	#3925A02LO-1

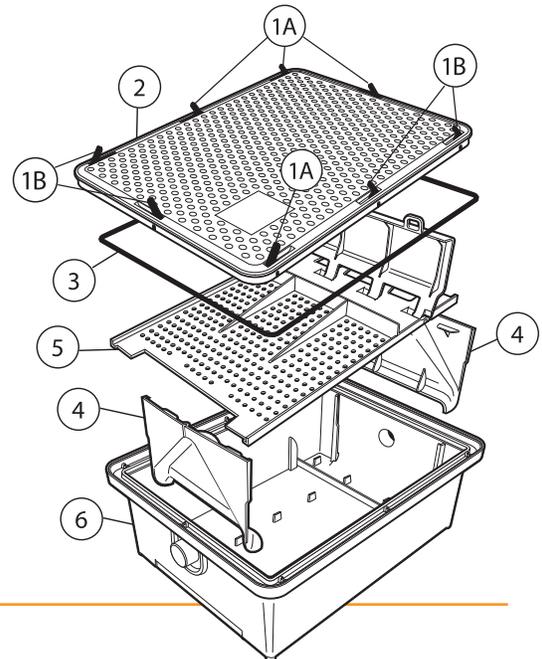

Eastern U.S. Customers
Tel: (289) 881-0120
Toll Free: 1-800-463-9572
Fax: (905) 844-0826
www.ipexamerica.com | sales@ipexamerica.com

Western U.S. Customers
Tel: (303) 373-1918
Toll Free: 1-888-461-5307
Fax: (303) 373-1923